


# 30" X 48" STEEL PULLBOX COVER PARKWAY

RIVERSIDE PUBLIC UTILITIES DEPT.—UNDERGROUND STRUCTURES

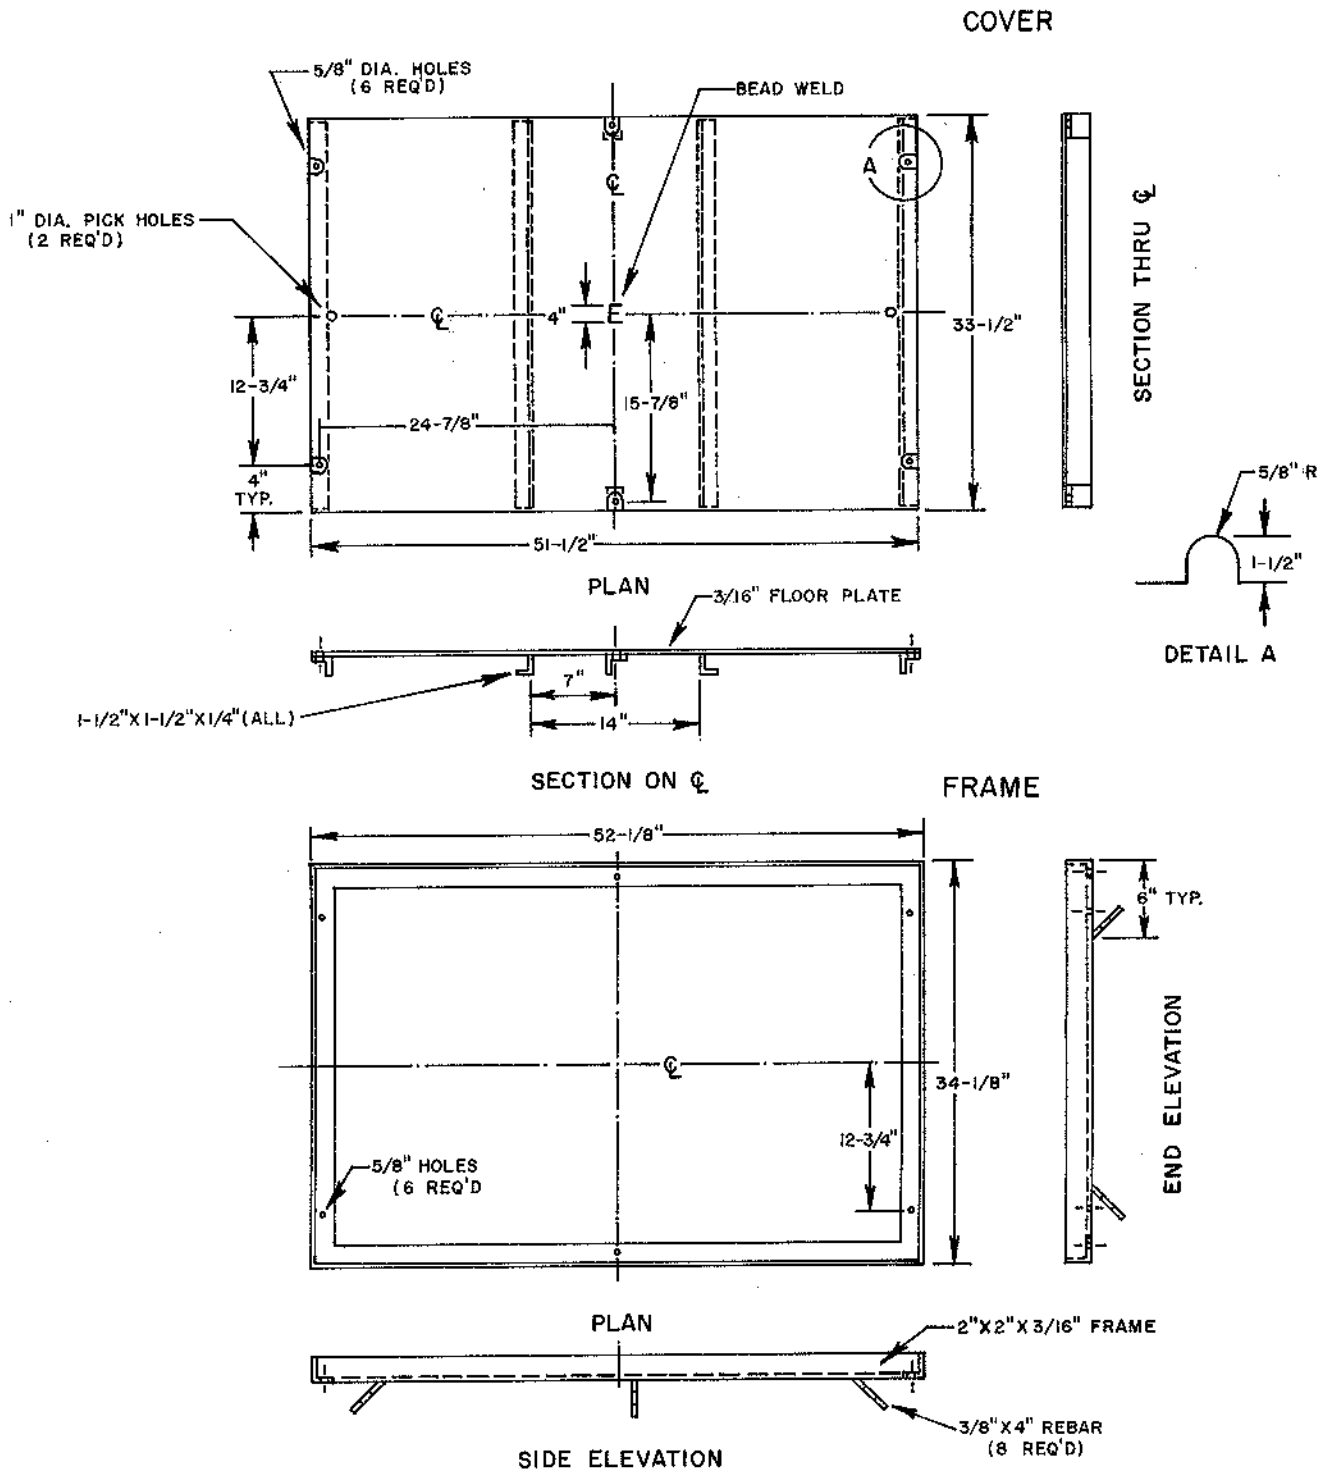

## NOTES:

1. SIX 1/2" SLOTTED HEX-HEAD STAINLESS STEEL BOLTS TO BE FURNISHED WITH EACH COVER.
2. CLEARANCE BETWEEN COVER & FRAME TO BE 1/8" ALL AROUND.
3. COVERS TO BE INTERCHANGEABLE.
4. COVERS SHALL BE TREATED, AFTER FABRICATION, WITH ONE COAT OF SUBALOX NO. 511 PRIMER AND THEN WITH ONE COAT OF SUBALOX NO. 510 ALUMINUM PAINT. PAINT OF EQUAL QUALITY MAY BE SUBSTITUTED IF DEPARTMENT APPROVAL IS OBTAINED.